

# 郴州功田电子陶瓷技术有限公司

CHENZHOU GONTCERA CERAMIC TECHNOLOGY CO., Ltd


## 1 Performance Index

Model	DR5.750GHz		
Resonant Frequency	5.750GHz		
Temperature Drift Coefficient	$0 \pm 5 \text{PPm}/^\circ\text{C}$		
Quality Factor	$\geq 8500$		

## 2 Structural Performance (mm)

(D×d×H)			
Medium Outer Diameter	$\phi 10.3 \pm 0.2$	Product thickness	$3.6 \pm 0.2$
Medium Diameter	$\phi 4.2 \pm 0.2$		

Product Structure:

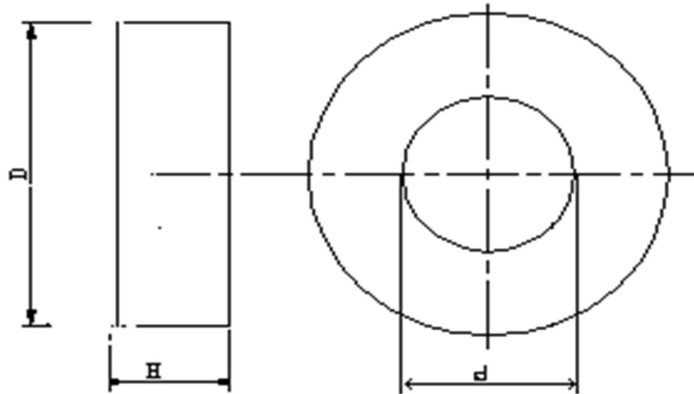

## 3 Operating and Storage

Operating Temperature	$-40^\circ\text{C} \sim +80^\circ\text{C}$
Storage Environment	Temperature: $-10^\circ\text{C} \sim +40^\circ\text{C}$ 、Humidity: $\leq 75\%$

## 4 Application

This is mainly used in the LO Circuit of satellite Receiving LNB, which can produce stable LO frequency 5.750GHz, and it can assure its stability that LNB can receive the satellite signal within the range of  $-40^\circ\text{C}$  to  $+80^\circ\text{C}$ .