

# 郴州功田电子陶瓷技术有限公司

CHENZHOU GONTCERA CERAMIC TECHNOLOGY CO., Ltd


## 1 Performance Index

Frequency	1568MHz ± 2MHz		
Impedance	40 Ω ± 5 Ω		
Polarization Mode	Right-Handed Circular Polarization		
Axial Ratio	≤ 3dB		
SWR	≤ 1.5		

## 2 Structural Performance (mm)

(D×D×H)	25×25×4		
Ceramic Chip Diameter	24.8 ± 0.2	Dceramic Chip Thickness	4.0 ± 0.1
d	0.83 ± 0.05	h	6.3 ± 0.2

Product structure: feeding point eccentric 2.6mm

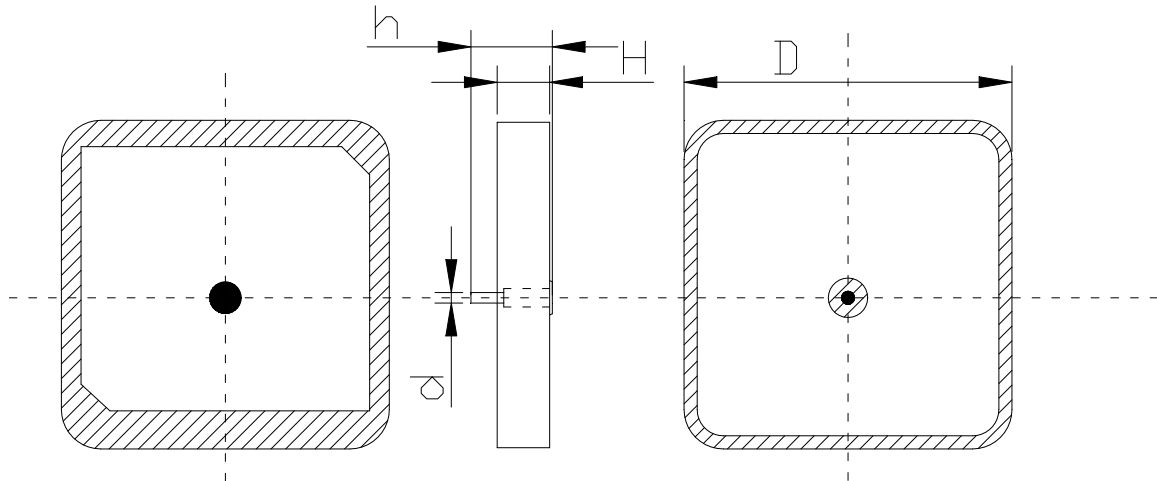

## 3 Operating and Storage Temperature

Operating Temperature	-40°C ~ +80°C
Storage Environment	Temperature: -10°C ~ +40°C、Humidity: ≤ 75% ,it must be used up within 6 months after the goods received, the time exposed to air ≤ 12H