


### 1 Performance Index

Model	G-DR2140
Resonant Frequency	2140MHz $\pm$ 8MHz
$\epsilon_r$ DK	Medium: $45 \pm 1$ ; Support: $9.8 \pm 1$
Quality Factor Q	$> 12000$
Temperature Coefficient Of Resonance	$0 \pm 3$ PPM/ $^{\circ}$ C

### 2 Structural Performance (mm)

Medium Outer Diameter	$24 \pm 0.4$	Medium Height	$9 \pm 0.5$
Medium Diameter	$7.3 \pm 0.3$	Support Height	$7.6 \pm 0.3$
Support Outer Diameter	$18 \pm 0.4$	Support Diameter	$3.2 \pm 0.2$

Product Str

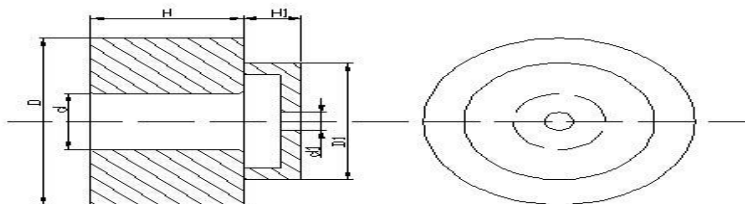

### 3 Operating and Storage

Operating Temperature	$-40^{\circ}$ C $\sim$ $+80^{\circ}$ C
Storage Environment	Temperature: $-10^{\circ}$ C $\sim$ $+40^{\circ}$ C、Humidity: $\leq 75\%$