

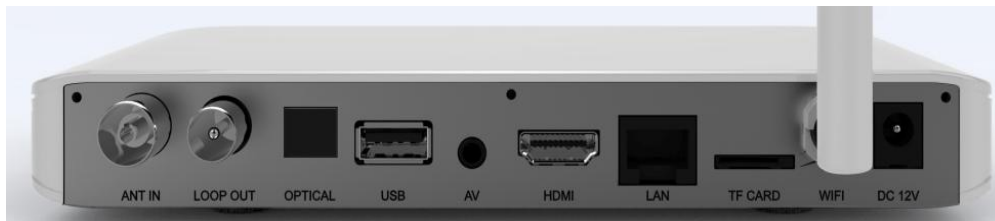
## Product Specification

- ◆ MODEL No.: GK7264A
- ◆ Category: Android DVB-ISDB+S2 HD H.264/H.265/MPEG-4/MPEG-2/AVS/Divx

### Main Features:

- ✓ DVB-S2+ISDB-T Compliant.
- ✓ Support GOSPELL card embedded CAS
- ✓ Support Android 7.0 OS
- ✓ Support Google browser inside,HTML 5 and Flash 10.1-10.3 support
- ✓ Support on-line shopping and Banking portal
- ✓ Social network portal(Fance Book, Twitter,etc)
- ✓ Support massive application/game installation,import APK files from usb and market
- ✓ HDTV / SDTV MPEG-2 / MPEG-4 / H.264 /H.265/ AVS / Divx/2K/4K decoding
- ✓ Support 1080P Full HD video decoding
- ✓ HDMI 1.4 and AV output that suitable for any TV and display
- ✓ Support USB mouse and keyboard operation and 2.4G QWERT Remote
- ✓ Support teletext/subtitle/multi-language
- ✓ Support EPG
- ✓ Channel edit function including Favourite, Move, Delete, Lock,Skip,Rename
- ✓ Variable aspect ratio (4:3/16:9) 4:3 Pan & Scan or Letter Box modes
- ✓ Support USB 2.0 and OTA software upgrade
- ✓ Support Multimedia MP3, AVI,DAT,MKV,MP4,VOB,WMA(Optional) ,RMVB player
- ✓ Support side-by-side / top-by-button 3D Video playing
- ✓ Built-in WIFI and external antenna for stable internet rexeiving

### Front panel:

**Rear Panel:**

SZ2101-Size: 188x112x32mm

**Technical specification****◆ Chipset and Memory:**

Chipset model: Hi3798MV200  
CPU Speed: 2GHz  
Nand Flash: 8GB/16GB EMMC  
RAM: DDR4-1GB/2GB

**◆ Power:**

Input power: DC12V&5V  
Maximum power consumption: 9W  
Standby power: ≤ 1W

**◆ Interface:**

RF IN: x1  
Loop OUT: x1  
AV: x1  
HDMI: x 1  
Optical: x1  
USB2.0: x2  
USB3.0: x1  
TF card: x1  
ETH: Ethernet x1  
WIFI: x 1

**◆ TUNER**

Tuner: R848C (DVB-S2+ISDB-T)  
Receiving Frequency: 950~2150MHz  
Input signal level: -25dBm~ -65dBm(75ohm)  
LNB Control: DiSEqC1.0/DiSEqC1.2/ DiSEqC1.3/22KHz  
LNB Power: 13V/18V(Max 350mA)  
Receiving Frequency: VHF 177.143-213.143MHz/UHF 473.143-803.143MHz  
Input signal level: -20~-81dBm  
RF Loop out function

**◆ Demodulation**

Demodulation: AVL6812TA  
Compliant with: DVB-S2+ISDB-T  
Demodulation: QPSK(SCPC/MCPC)/8PSK  
Symbol rate: 1.5~45MSPS  
Compliant with: ISDB-T  
Guard interval Modes: 1/32, 1/16, 1/8, 1/4  
FEC Modes Rate: 1/2, 2/3, 3/4, 5/6, 7/8  
IF bandwidth: 6MHz&8MHz

**◆ Video Decoding**

Compliant with: MPEG2 MP@HL, MPEG4 SP@L0-3, ASP@L0-5,  
H.264 HM@L4.1 AVS MP@L6.0 / H.265 Main Profile@L5.0 High-tier  
Aspect ratio: 4:3/16:9  
Video format: PAL / NTSC / SECAM  
Resolution: 480i/480p/576i/576p/720p/1080i/1080p/4K\*2K

**◆ Audio Decoding**

Compliant with: MPEG-1/2/ , HE AAC(Optional), AC3(Optional)

**◆ WIFI standards**

Compliant with: 802.11 b/g/n