

Product Specification

- ◆ MODEL No.:GSR-HN4915
- ◆ Category:DVB-S2 HD H.264/MPEG-4/MPEG-2

Main Features:

- ✓ **DVB-S & DVB-S2 Compliant.**
- ✓ **MPEG-2 MP@HL video decoder**
- ✓ **AVC/H.264 HP@L4.1 video decoder**
- ✓ **MPEG4 ASP supported**
- ✓ **Fully compliant with HDMI1.3 specification**
- ✓ **Video Resolution: 1080p,1080i,720p,720i,576p,576i**
- ✓ **USB2.0 for PVR, Time-shift and timer.**
- ✓ **Support MP3/ WMA, AVI/MKV/MP4/..., BMP/JPG playback.**
- ✓ **Blind scan, Sat scan, TP scan , NIT scan**
- ✓ **Max 2000 TP and 4000 Programs restore.**
- ✓ **DiSEqC1.0/DiSEqC1.2/ DiSEqC1.3(USALS).**
- ✓ **Support 7-day EPG, Teletext and Subtitle.**
- ✓ **Parental lock, Channel Edit, Favor edit.**
- ✓ **OTA 、 RS232 、 USB upgrade**

Front Panel:





Rear Panel:



Technical specification:

◆ **Chipset and Memory:**

Processor : ALI M3510C
Flash:4MB\8MB serial flash
DDR: DDRII 800 64MB
TUNER:M3031

◆ **Power**

Input: DC12V 1.5A
Operating:15W MAX

◆ **Interface:**

ANT IN x1
LOOPOUT x1 (optional)
AV: RCA x4
HDMI 1.3x1
USB2.0 port: x2 (optional)
RS232 4Pin

◆ **Video Decoding**

Compliant with: MPEG-4 part10 /MPEG-2 ISO/IEC 13818,
MPEG-4 Simple/Main/Advanced Profile@Level3(10Mbps),
MPEG-2 Main Profile@ Main Level(15 Mbps)
H.264 MP@L3(10Mbps),H.264 HP@L4.1 (25Mbps)
Video Resolution: 1080p,1080i,720p,720i,576p,576i

◆ **Audio Decoding**

Compliant with: MPEG-1/2/3, AC-3, HE AAC (optional)
Support Dolby down-mixed 2 channel (optional)

◆ **Physical**

Dimensions (W x H x D) 147x 92 x 22 mm
Weight: 0.5 kg
Temperature: 0 °C ~ +45 °C
Humidity: 8%~95%

◆ **Accessories**

Remote Control
AV Cable
HDMI Cable
User Manual

产品简介

◆ 型号.: HN4911

◆ 类别: 高清 DVB-S2 卫星数字电视接收机 H.264 /MPEG-4/MPEG2


主要功能:

- 完全符合 DVB-S2 卫星数字电视接收标准
- 输入频率范围 950MHz-2150MHz
- 支持高清、标清 MPEG-2/MPEG-4/H.264 节目播放
- 完美支持 H.264 以及 MPEG4/AVC
- 支持高分辨率视频输出 480i/480P/576i/576P/720P/1080i/1080P
- 接收 QPSK/8PSK 调制的 DVB-S/S2 数字电视信号
- 最大可存储 2000 个转发器或 4000 套节目信息
- 支持七天 EPG 功能
- 全自动节目搜索
- 独特的快速选台功能
- 智能图形化操作界面
- 多国语言 OSD
- 支持 DiSEq1.0、DiSEq1.2
- DiSEq1.2 支持 13/18V,0/22KLNb 控制
- SCPC 或者 MCPC 接收, C 或 KU 波段兼容接收
- 可对频道进行喜爱、移动、删除、加锁设置
- 支持 4:3 和 16:9 屏幕宽度比转换
- 支持强大软件升级功能 (USB/OTA 空中升级)
- 支持 USB2.0MP3 音乐播放与 JPG 图片显示
- 支持外置 USB PVR 录像功能

前面板:



后面板:

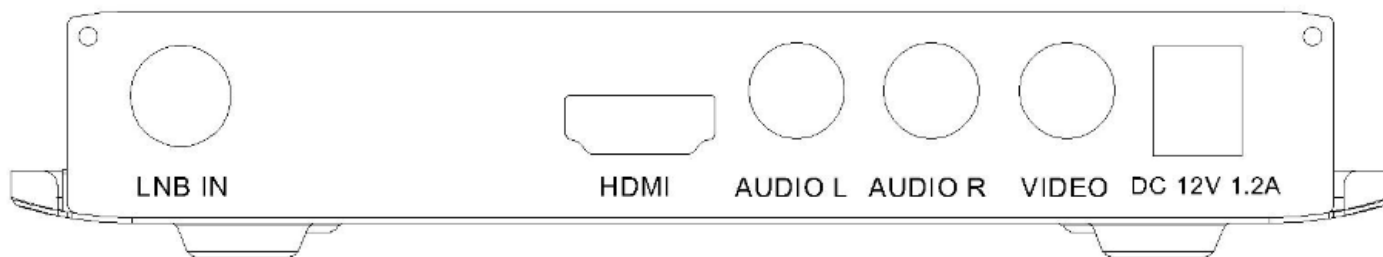

技术规格:

◆ 主芯片和内存

主芯片: ALI M3510C
闪存: 4MB\8MB serial flash
内存: DDRII 800 64MB
TUNER: M3031

◆ 电 源

电源输入: DC12V 1.5A
功率: 最大 15W

◆ 接口:

天线接口: x1
环路输出: x1(可选)
音视频: RCA x4
高清接口: x1
USB2.0: x2 (可选)
RS232 4 芯排针

◆ 视 频 解 码:

遵循标准: MPEG-4 part10 /MPEG-2 ISO/IEC 13818,
MPEG-4 Simple/Main/Advanced Profile@Level3(10Mbps),
MPEG-2 Main Profile@ Main Level(15 Mbps)
H.264 MP@L3(10Mbps), H.264 HP@L4.1 (25Mbps)
分辨率: 1080p, 1080i, 720p, 720i, 576p, 576i

◆ 音 频 解 码:

遵循标准: MPEG-1/2/3, AC-3, HE AAC (optional)
Support Dolby down-mixed 2 channel (optional)

◆ 物理尺寸:

尺寸 (长 x 宽 x 高) 147x 92 x 22 mm
重量: 0.5 kg
工作温度: 0 °C ~ +45 °C
湿度: 8%~95%

◆ 附件:

遥控器
AV 线
高清线
说明书